




New SuperStar Winder

2019

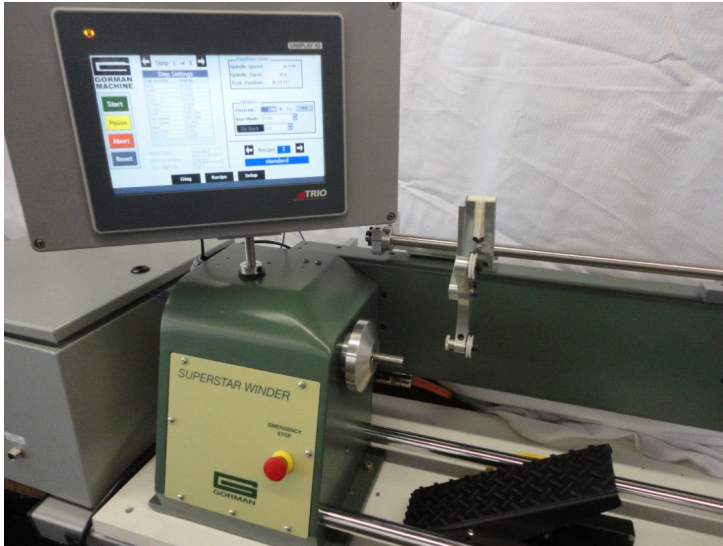

Gorman Machine Corp has developed the new SuperStar Winding Machine for the purpose of having a machine that can handle all the unique winding requests we previously could not offer. The new Trio Controller in combination with the 10" Trio HMI controls the following winding functions.

Up to 20 Recipes with up to 28 Steps in a Recipe, Multi Language support, Inch or MM Programming.

Wire size range: From 12 AWG (2mm) to the finest. Winding RPM speed range: 0-3000.

Bobbin Diameter: Max clearance radius 5" (126mm). Standard spindle tip to closed tailstock: 12" (305mm)

Pyramid and angle winding. Variable pitch winding. Dwell function. Modem for remote updating of programs.

Jog to starting position and then wind cycle from that new temporary shift position

Repeat Recipe X amount of times to save programming.

Variable Speed Foot Pedal for controlling speed and for jogging backwards or forwards to repair

windings.

Go Back X amount of turns to repair windings and then resume from that position and the traverse will move either direction in coordination with the spindle.

New winding functions can be added or existing Winding Functions can be modified for particular needs.

Machine Dimensions: 43" Wide X 20" Deep X 27" High. Trio Control Box: 16" L X 16" W X 12" H. Bench Weight 110 LBS, Control Box 40 LBS. Shipping Weight 300 LBS.